


Filo Lever

LEVER ON ROSE • CONCEALED FIX • SUPPLIED IN PAIRS

CL – FL – 001 – [SPECIFY FINISH ON ORDER]

FIRE RATING FD30 / FD60	FIXING Bolt-through • concealed	GUARANTEE Termless	ORIGIN Designed London
----------------------------	------------------------------------	-----------------------	---------------------------

DIMENSIONAL DRAWING

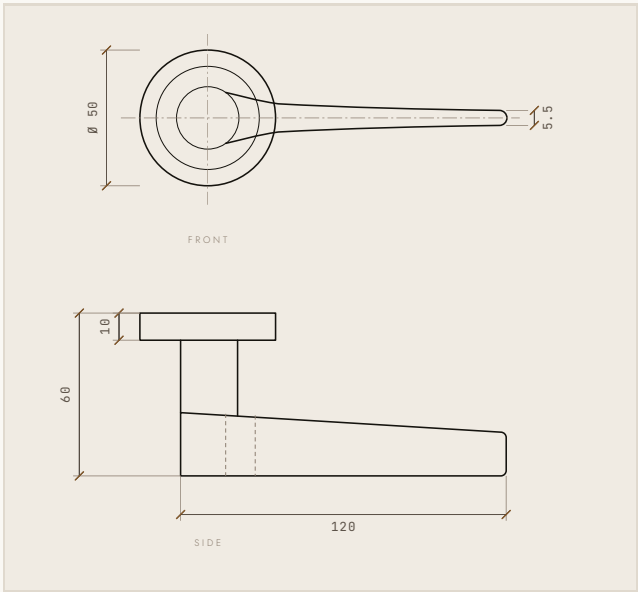

FRONT • SIDE ELEVATION • DIMENSIONS IN MM • DRAWN CAST LONDON

TECHNICAL SPECIFICATION

Material	Steel
Fire rating	FD30 / FD60 *
Lever length	120 mm
Projection	60 mm
Rose	Ø 50 mm × 10 mm
Blade section at tip	5.5 mm
Rose construction	Two-piece • screw-on cover
Spindle	Supplied • grub-screw fixed
Door preparation	Ø 20 mm centre hole
Suits door thickness	34 – 54 mm
Supplied	Pair • spindle • full fixing pack

MANUFACTURING TOLERANCE
± 0.2 mm • CAST STANDARD

FINISH MATRIX

Cast Brass CB	Cast Nickel CN	Cast Bronze CBZ	Cast Black CK	Cast Gunmetal CG	Cast Slate CS
TRADE • FINISHED+					

* Fire rated for use on FD30 and FD60 timber fire doors. Fire test certificate available on request – studio@castlondon.co.uk.