


Filo Lever Square

TAPERED BLADE • SQUARE ROSE • SOLID BRASS • FIRE RATED

CL - FL - 002 - [SPECIFY FINISH ON ORDER]

FIRE RATING FD30 • FD60	DOOR THICKNESS 35 – 55 mm	GARANTEE Termless	ORIGIN Designed London
----------------------------	------------------------------	----------------------	---------------------------

DIMENSIONAL DRAWING

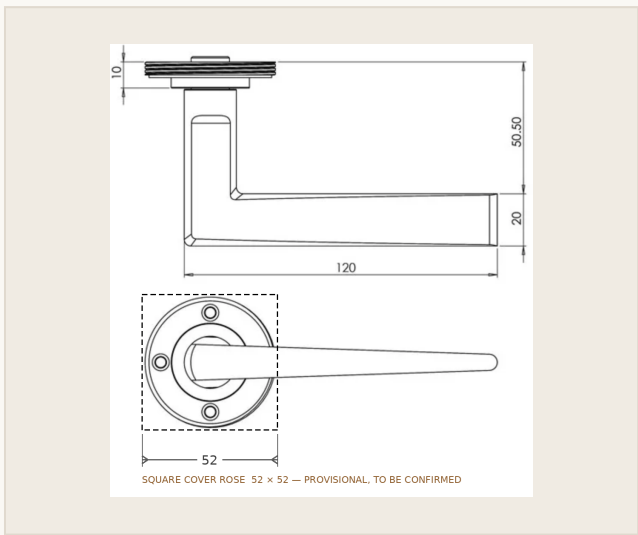

ELEVATION & PLAN • DIMENSIONS IN MM • ROSE PROVISIONAL

TECHNICAL SPECIFICATION

Material	Solid brass
Lever length	120 mm
Blade depth	20 mm
Projection	50.5 mm
Rose	52 × 52 mm • provisional
Rose thickness	10 mm
Fixing	Concealed • three-screw plate
Door thickness	35 – 55 mm
Fire rating	FD30 • FD60
Corrosion resistance	Grade 4
Application	Timber • FD30 and FD60 doors
Use	Interior
Supplied	Pair • spindle • fixings

MANUFACTURING TOLERANCE

± 0.2 mm • CAST STANDARD

FINISH MATRIX

Cast Brass CB	Cast Nickel CN	Cast Bronze CBZ	Cast Black CK	Cast Gunmetal CG	Cast Slate CS
TRADE • SPECIFIED					

The Filo blade on a square rose. Specify CL-FL-001 Filo Lever Round for the same blade on a circular rose. Fire rated FD30 and FD60, Grade 4 corrosion resistance, suits door thicknesses 35 – 55 mm. Rose dimension 52 × 52 mm is provisional and shown dashed on the drawing — to be confirmed with the supplier before issue.

CAST STANDARD TOLERANCE ±0.2MM SERIES 02 / HARDWARE FIRE FD30 / FD60 QC PASSED • CL-QC-001