


Asta Lever

KNURLED BAR • ROUND ROSE • SPRUNG • FIRE RATED

CL - LV - 001 - [SPECIFY FINISH ON ORDER]

FIRE RATING FD30 • FD60	STANDARD BS EN 1906 Grade 3	GARANTEE Termless	ORIGIN Designed London
----------------------------	--------------------------------	----------------------	---------------------------

DIMENSIONAL DRAWING

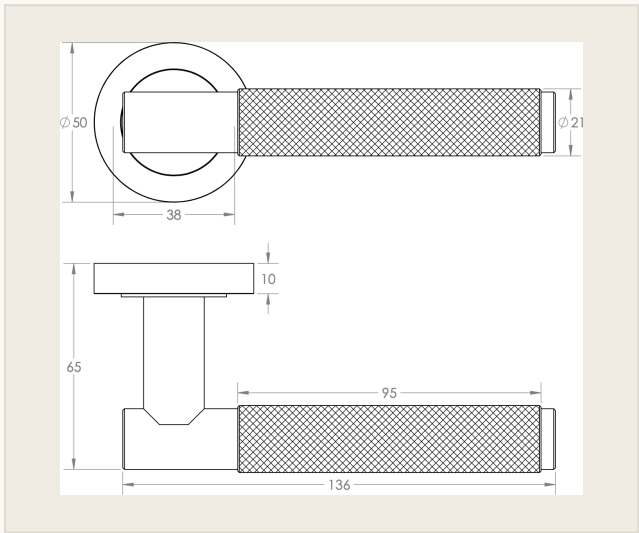

FRONT & PLAN VIEWS • DIMENSIONS IN MM

TECHNICAL SPECIFICATION

Material	Steel
Lever length	136 mm
Lever diameter	Ø 21 mm
Knurled section	95 mm
Projection	65 mm
Rose	Ø 50 × 10 mm
Rose type	Sprung
Spindle	8 mm
Fire test	BS EN 1634-1
Corrosion resistance	Grade 4
Application	Timber • Interior
Supplied	Pair • spindle • fixings

MANUFACTURING TOLERANCE
± 0.2 mm • CAST STANDARD

FINISH MATRIX

Cast Brass CB	Cast Nickel CN	Cast Bronze CBZ	Cast Black CK	Cast Gunmetal CG	Cast Slate CS
TRADE • SPECIFIED					

Included in a successful fire test to BS EN 1634-1 and assessed for use on FD30 and FD60 timber fire doors. The rose is sprung, so no separate lever spring is required. Pairs with the Cast Latch or the Cast Bathroom Lock on a common 8 mm spindle.

CAST STANDARD TOLERANCE ±0.2MM SERIES 02 / HARDWARE FIRE FD30 / FD60 QC PASSED • CL-QC-001