


Velo Lever

FLAT BLADE • CONCEALED MINI ROSE • SPRUNG
CL – LV – 002 – [SPECIFY FINISH ON ORDER]

APPLICATION Internal timber doors	FIRE RATING Not fire rated	GUARANTEE Termless	ORIGIN Designed London
--------------------------------------	-------------------------------	-----------------------	---------------------------

DIMENSIONAL DRAWING

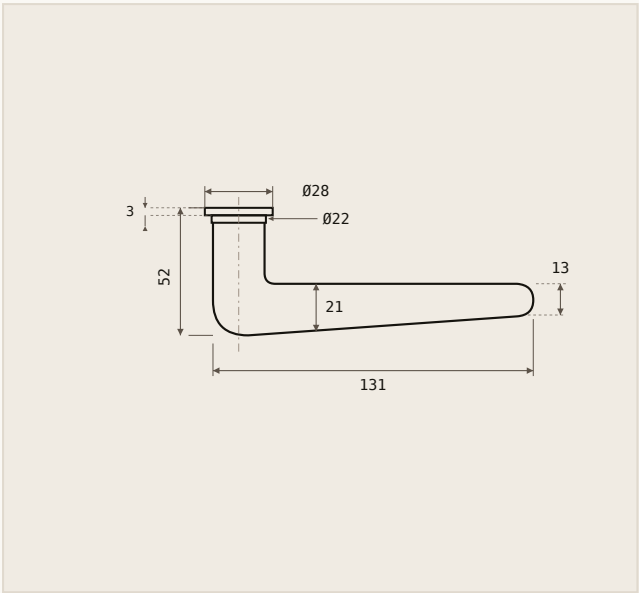


SIDE ELEVATION • 1:2 • DIMENSIONS IN MM

TECHNICAL SPECIFICATION

Range	Velo
Material	Steel
Lever length	131 mm
Section at shoulder	21 mm
Section at tip	13 mm
Projection	52 mm
Rose	Ø 22 mm • mini
Rose thickness	3 mm
Collar	Ø 28 mm
Operation	Sprung • concealed fixing
Spindle	To suit supplied spindle
Pack quantity	1 pair • spindle • fixings

MANUFACTURING TOLERANCE
± 0.2 mm • CAST STANDARD

FINISH MATRIX

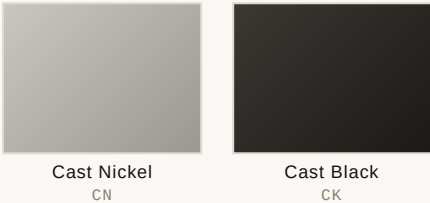

The Velo range is produced in Cast Nickel and Cast Black only. For a scheme in brass, bronze or gunmetal, specify the Asta or Filo lever.