


Velo Lever Round

ROUND BAR · CONCEALED MINI ROSE · SPRUNG
CL – LV – 003 – [SPECIFY FINISH ON ORDER]

APPLICATION Internal timber doors	FIRE RATING Not fire rated	GUARANTTEE Termless	ORIGIN Designed London
--------------------------------------	-------------------------------	------------------------	---------------------------

DIMENSIONAL DRAWING

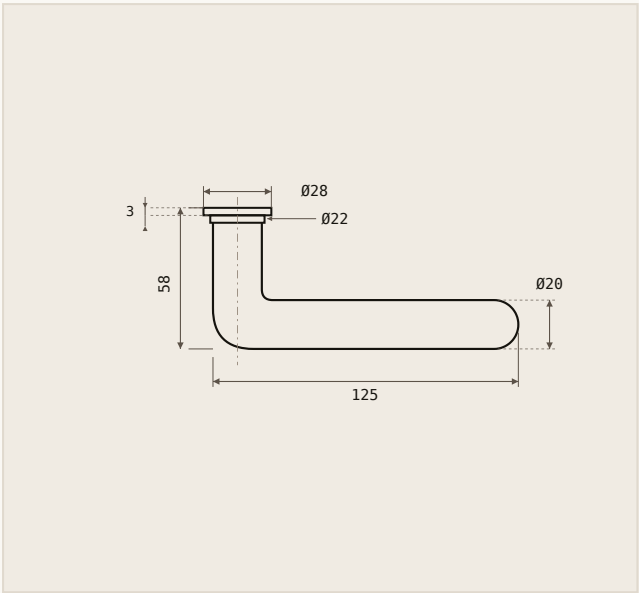


SIDE ELEVATION · 1:2 · DIMENSIONS IN MM

TECHNICAL SPECIFICATION

Range	Velo
Material	Steel
Lever length	125 mm
Section	Ø 20 mm · constant
Projection	58 mm
Rose	Ø 22 mm · mini
Rose thickness	3 mm
Collar	Ø 28 mm
Operation	Sprung · concealed fixing
Spindle	To suit supplied spindle
Pack quantity	1 pair · spindle · fixings

MANUFACTURING TOLERANCE
± 0.2 mm · CAST STANDARD

FINISH MATRIX

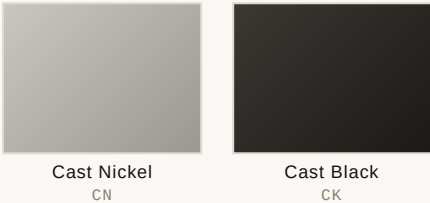

The Velo range is produced in Cast Nickel and Cast Black only. For a scheme in brass, bronze or gunmetal, specify the Asta or Filo lever.