
Asta Lever Reeded

REEDED ROUND BAR · ROUND ROSE · AEROSPACE-GRADE ALUMINIUM · Ø22

CL — LV — 005 — [SPECIFY FINISH ON ORDER]

FIRE	GRADE	ACTION	GUARANTEE
FD30 · FD60	BS EN 1906 · 3	Sprung	Termless

DIMENSIONAL DRAWING

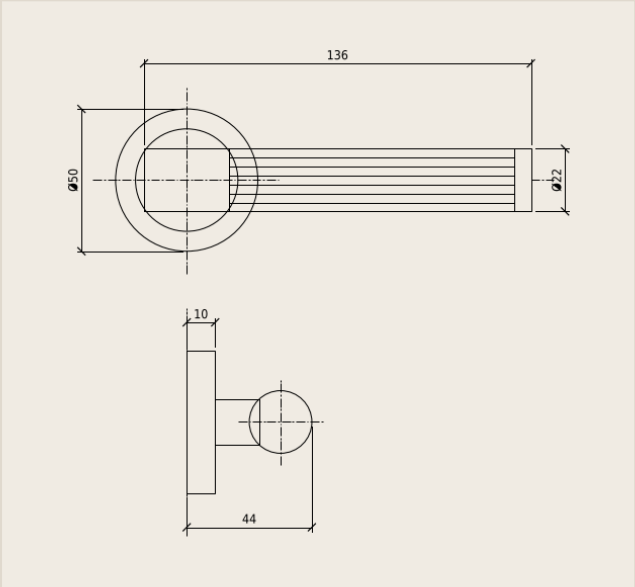

FRONT AND SIDE ELEVATION · REEDING AND COLLAR INDICATIVE · MM

TECHNICAL SPECIFICATION

Bar	Ø22 × 136 mm
Grip	Linear reeded
Sleeve + end	Plain · chamfered end
Projection	44 mm
Rose	Ø50 × 10 mm · stepped
Material	Aerospace-grade aluminium
Door thickness	35 – 54 mm
Fixing	Back-to-back · grub screw
Spindles	90 + 110 mm supplied
Pack	1 pair · spindles, fixings

PAIRS WITH
Asta Turn · Cast Latch · Cast Bathroom Lock

FINISH MATRIX

Cast Bronze	Cast Brass	Cast Nickel	Cast Black
CBZ	CB	CN	CK

ASTA LEVER ON ROSE SERIES 01 / HARDWARE ALUMINIUM QC PASSED · CL-QC-001