
Toro Lever

CURVED ROUND BAR · TWO TURNED RINGS · ROUND ROSE · ALUMINIUM · 142

CL — LV — 006 — [SPECIFY FINISH ON ORDER]

FIRE	GRADE	ACTION	GUARANTEE
FD30 · FD60	BS EN 1906 · 3	Sprung	Termless

DIMENSIONAL DRAWING

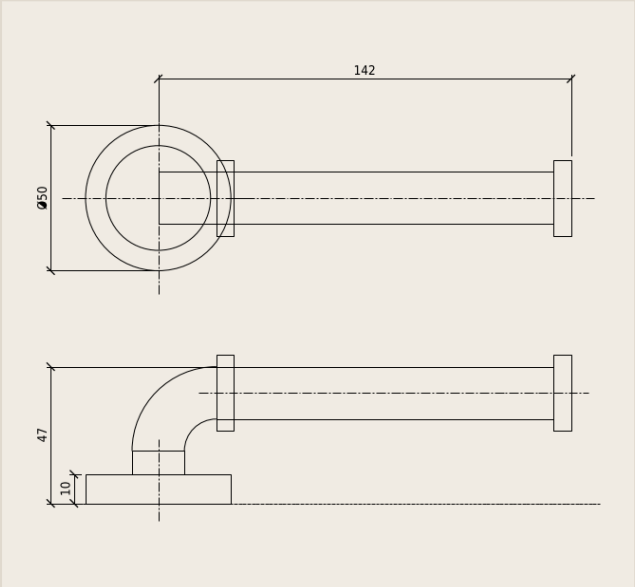

FRONT ELEVATION AND PLAN · BAR, RINGS AND BEND INDICATIVE · MM

TECHNICAL SPECIFICATION

Lever length	142 mm
Form	One swept 90° bend
Detail	Two turned rings · flared end
Projection	47 mm
Rose	Ø50 × 10 mm · stepped
Material	Aerospace-grade aluminium
Corrosion	Grade 4
Door thickness	35 – 54 mm
Fixing	Back-to-back · grub screw
Pack	1 pair · 90 + 110 mm spindles

PAIRS WITH
Asta Turn · Cast Latch · Cast Bathroom Lock

FINISH MATRIX

Cast Brass	Cast Nickel	Cast Bronze	Cast Black
CB	CN	CBZ	CK

TORO LEVER ON ROSE ARCHITECTURAL HARDWARE ALUMINIUM QC PASSED · CL-QC-001