


Fonte Shower Set

THERMOSTATIC • CONCEALED • STAINLESS STEEL

CL - SH - 002 - [SPECIFY HEAD • CONTROLS • FINISH ON ORDER]

CONTROL Thermostatic • anti-scald	CARTRIDGE Anti-calc thermostatic	WARRANTY Termless	ORIGIN Designed London
--------------------------------------	-------------------------------------	----------------------	---------------------------

DIMENSIONAL DRAWING

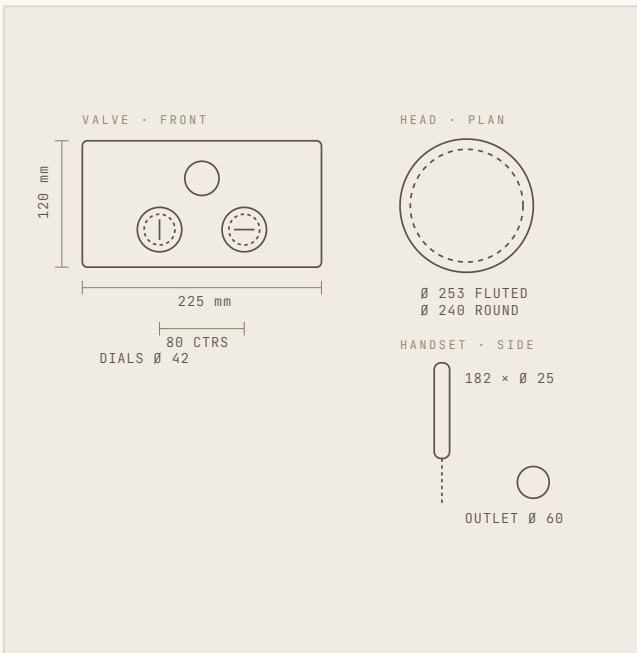

VALVE FRONT • HEAD PLAN • DIMENSIONS IN MM

TECHNICAL SPECIFICATION

Material	Stainless steel
Valve plate	225 × 120 mm • 1.5 mm profile
Dials	Ø 42 × 26 mm • 80 mm centres
Control	Outlet above • temp & flow below
Head — Fluted	Ø 253 mm • 350 mm arm
Head — Round	Ø 240 mm • 340 mm arm
Handset	182 mm × Ø 25 mm
Wall outlet	Ø 60 mm • integrated elbow
Hose	1.5 m
Connections	G½
Minimum pressure	0.5 bar

MANUFACTURING TOLERANCE

± 0.2 mm • CAST STANDARD

FLOW RATE • BY SYSTEM PRESSURE

0.5 BAR 7.7 L/MIN	1 BAR 10.8 L/MIN	2 BAR 15.2 L/MIN	3 BAR 18.4 L/MIN	5 BAR 24.5 L/MIN
-------------------------	------------------------	------------------------	------------------------	------------------------

SUPPLIER-VERIFIED • MINIMUM OPERATING PRESSURE 0.5 BAR

FINISH MATRIX



Cast Brass
CB

Cast Nickel
CN

Cast Bronze
CBZ

Cast Black
CK

Cast Gunmetal
CG

CAST STANDARD TOLERANCE $\pm 0.2\text{MM}$ SERIES 02 / BATHROOM TERMLESS GUARANTEE QC PASSED • CL-QC-001

Cast *London*

CL-SPEC / SH-002 / REV B / 08.2026

CASTLONDON.CO.UK • LONDON • 2026