


Arco Wall-Mounted Basin Mixer

SINGLE LEVER · WALL MOUNTED · CONCEALED VALVE · BRASS

CL - WB - 001 - [SPECIFY FINISH ON ORDER]

STANDARD EN 817	CARTRIDGE 35 mm ceramic disc	GUARANTEE Termless	ORIGIN Designed London
--------------------	---------------------------------	-----------------------	---------------------------

DIMENSIONAL DRAWING

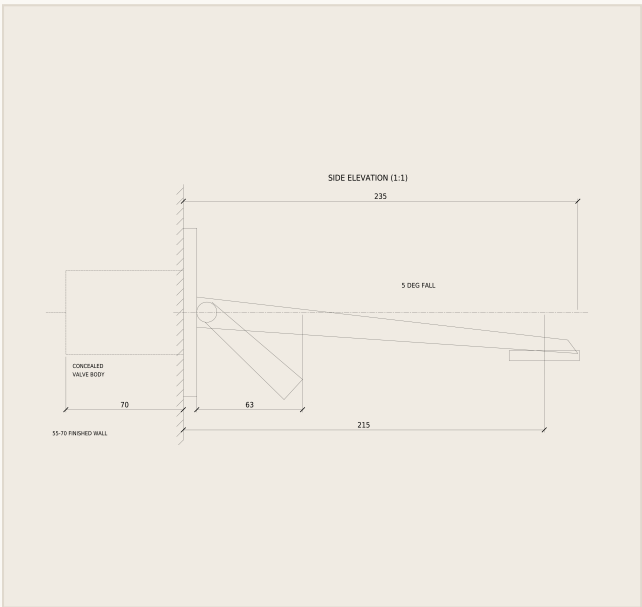

SIDE ELEVATION · 1:1 · DIMENSIONS IN MM

Projection is measured from the finished wall face. The concealed body is set so that the finished wall sits 55 – 70 mm over its face.

TECHNICAL SPECIFICATION

Material	Brass
Cartridge	35 mm ceramic disc
Backplate	230 × 100 mm · R20
Spout projection	235 mm overall · 215 to outlet
Spout angle	5°
Spout outlet	Ø 42 mm · aerated
Wall centres	120 mm
Lever	143.5 mm
Concealed depth	55 – 70 mm
Connections	G1/2"
Flow rate	12 L/min @ 3 bar
Operating pressure	0.5 – 5 bar
Temperature range	5 – 65 °C
Installation	Wall mounted · concealed
Net weight	1.6 kg

MANUFACTURING TOLERANCE
± 0.2 mm · CAST STANDARD

FINISH MATRIX

Cast Brass CB	Cast Nickel CN	Cast Bronze CBZ	Cast Black CK	Cast Gunmetal CG	Cast Slate CS TRADE ONLY

CAST STANDARD TOLERANCE ± 0.2 MM SERIES 01 / BRASSWARE ARCO RANGE

DRAWINGS FOR REFERENCE · INSTALL TO THE PRODUCT RECEIVED